


TREE WELL OPENING IN SIDEWALK

SCALE:
NOT TO SCALE

REVISION DATE:
11-06-2006

SHEET #:
1 OF 1

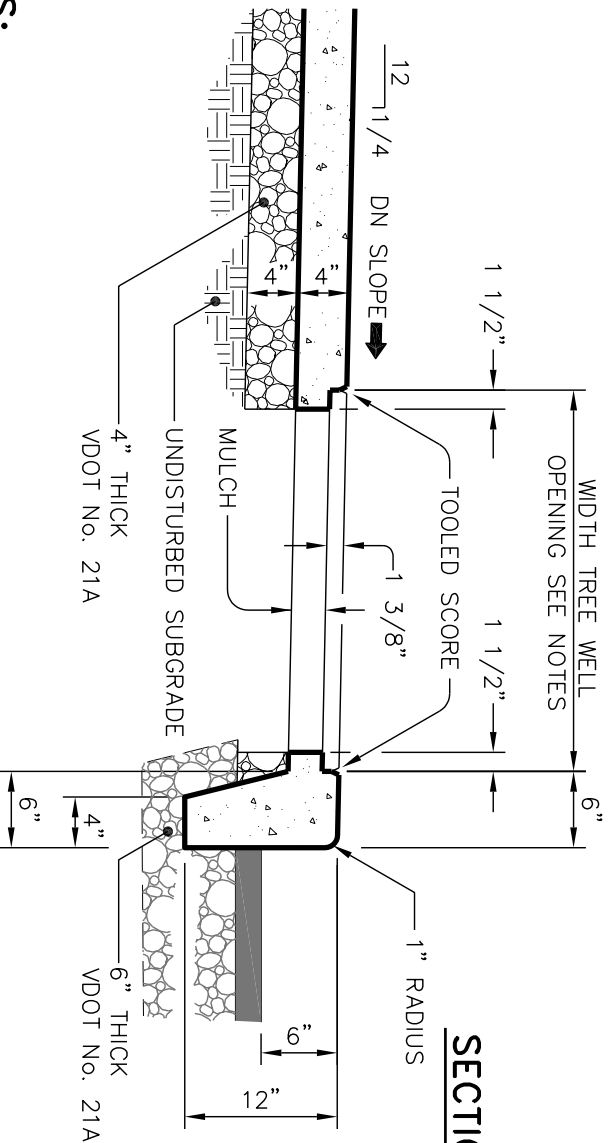

SECTION A-A

1. FOR 4' SIDEWALKS USE NEENAH R-8710 180° SQUARE WITH 3/8" SLOT OPENINGS.
2. FOR 5' SIDEWALKS USE NEENAH R-8712 180° SQUARE WITH 3/8" SLOT OPENINGS.
3. FOR NEW CONSTRUCTION: SIDEWALK AND CURB TO BE POURED MONOLITHICALLY.
4. FOR EXISTING SIDEWALK: SAW CUT SIDEWALK FOR TREE WELL OPENING.
5. CONCRETE TO BE CLASS 3,000 P.S.I.